


Door Panels & Door Mounted Blinds

Measurement guidelines for the following treatments:

- Door Panels
- Door Mounted Blinds
- Door Mounted Shades

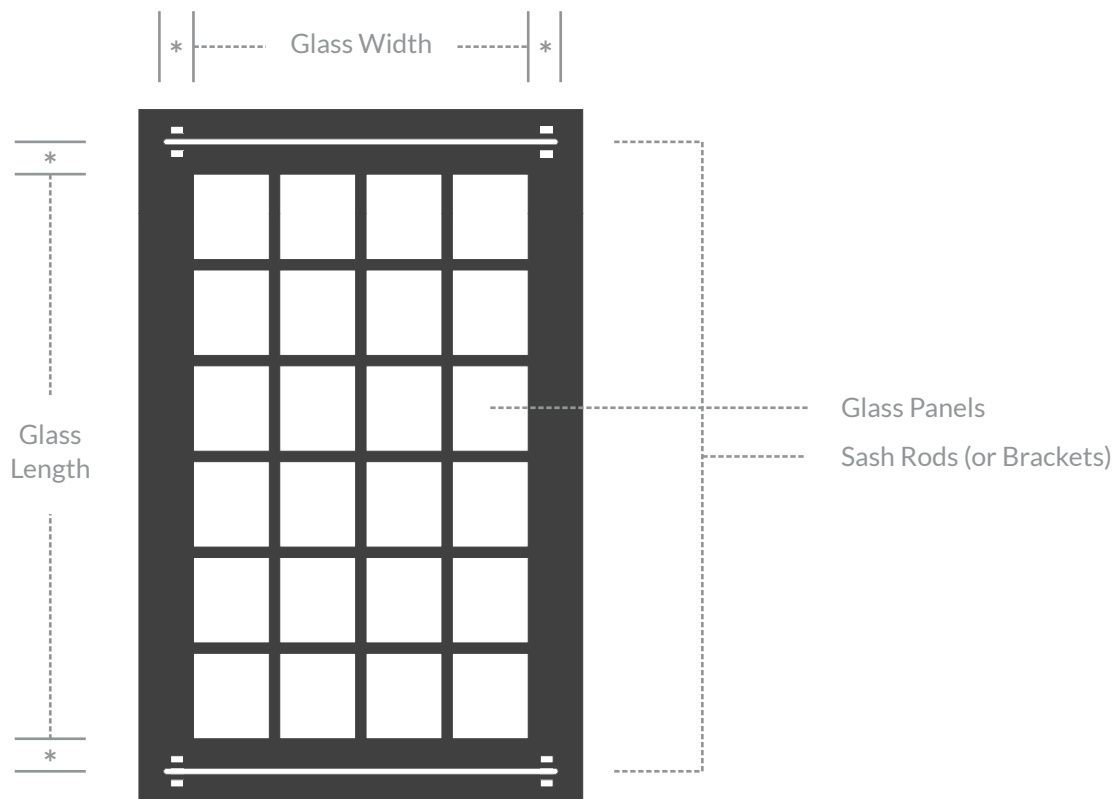

Determine The Bracket Location

When surface mounting sash rods or brackets for door-mounted blinds or shades, it is recommended to set the brackets a minimum of 2" out and above the glass width and length.

Helpful Tips

Most blind manufacturers provide "hold down" brackets that secure the bottom of the blind in place for when the door is opened and closed.

Room _____

Colors _____

of Windows _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Room _____

Colors _____

of Windows _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Room _____

Colors _____

of Windows _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Room _____

Colors _____

of Windows _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Room _____

Colors _____

of Windows _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Room _____

Colors _____

of Windows _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____

Length _____ Width _____